

## Relative pressure sensor CL 1

- Measurement of static and slow-changing pressure
- High accuracy and reliability
- High stability and repeatability
- Wide temperature range
- Three year warranty and after market service



The sensor CL1 has a flat metal diaphragm and a strain gage full bridge. The bridge is balanced and thermal compensated. CL1 can be used in labors and industry to measure relative pressure, both static and slow-changing in non aggressive chemical liquids or gases. Especially recommended by processing pressure into electrical signal in hydraulic or industrial automatics systems.

The sensor CL 1 can be made in following configurations:

- R1, R2 – strain gage bridge
- 2I4, 3U1, 3U5, 3U10 – with processing unit in sensors casing.


### Specifications:

Range		[MPa]	0,10; 0,24; 0,64; 1,00; 2,4; 6,4; 10; 24; 64
Accuracy			0,2; 0,5
Output signal:	R1	mV/V	10
	2I4	mA	4 ÷ 20
	3U1	V	1
	3U5	V	5
	3U10	V	10
Nominal voltage supply	R1		10
	2I4	[Vdc]	12 ÷ 36
	3U		12 or 24
Strain gage resistance		[Ω]	350
Operating temperature		[°C]	-20 ÷ 45
Protection degree			IP40, IP67
Material			steel, copper
Dimensions			as in a table
Cable length			0,5 m (standard) or other optional
Connector			Z1 - LUMBERG, O1 – O-ring gland

Manufacturer:

Zakład Elektroniki Pomiarowej Wielkości nielektrycznych, 05-270 Marki, ul. Kołtąja 8  
tel./fax (0 22) 781 21 69, 771 24 11, e-mail: [zepwn@zepwn.com.pl](mailto:zepwn@zepwn.com.pl), <http://www.zepwn.com.pl>

## Relative pressure sensor CL 1

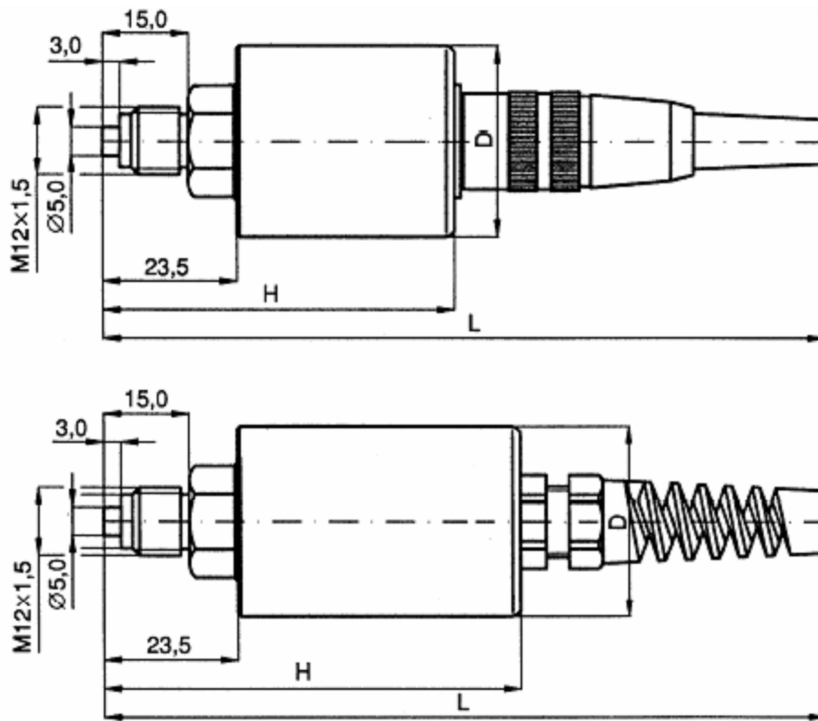


### Quality assurance

Each sensor is detailed examined after manufacturing process. The manufacturer offers 36 month warranty for the sensor and after that time also repair and calibration services.

### Overall dimensions:

Size	D	H	L
Configuration R1 [mm]	31	62	127
Configuration 2I, 3U [mm]	31	74	127

### Options:



Range: [MPa] 0,1; 0,24; 0,64; 1,0; 2,4; 6,4; 10; 24; 64

Accuracy: 0,2

Configurations: R1; 2I4; 3U1, 3U5, 3U10

Supply voltage: 10 V, 12 V, 24 V

Connector: Z1 - Lumberg DIN 45329, O1 – stuffing with stay wire

Cable length: 0,5 m (standard) or other optional [m]

### Example of options for ordering:

CL 1 - 10 MPa - 0,2 - R1 - 10 - Z1 – 1: pressure sensor with range 10 MPa; accuracy 0,2; strain gage bridge 350  $\Omega$  with sensitivity 1mV/V; supply voltage 10 V; connector Lumberg; cable length 1 m.

Manufacturer:

Zakład Elektroniki Pomiarowej Wielkości nieelektrycznych, 05-270 Marki, ul. Kołłątaja 8  
tel./fax (0 22) 781 21 69, 771 24 11, e-mail: [zepwn@zepwn.com.pl](mailto:zepwn@zepwn.com.pl), <http://www.zepwn.com.pl>